

Fast Wall Solution Panel Solution

SPC Wall Panel


Fast and high-performance alternative to tiles, marble or paint.



- *Water proof*
- *Fast to fit*
- *Heavy metal-free*
- *Phthalate-free*

SPC Wall Panel Specification

Thickness	Width	Height	Joint
3mm	1200mm		H Joint (trim)
4.0mm	600mm	2400/2600/Customized	T&G/Hidden H Joint/ H Joint (trim)
	980mm		
	1200mm		
	600mm	1200mm	4-side T&G
	305mm	610mm	
	180mm	1220mm	

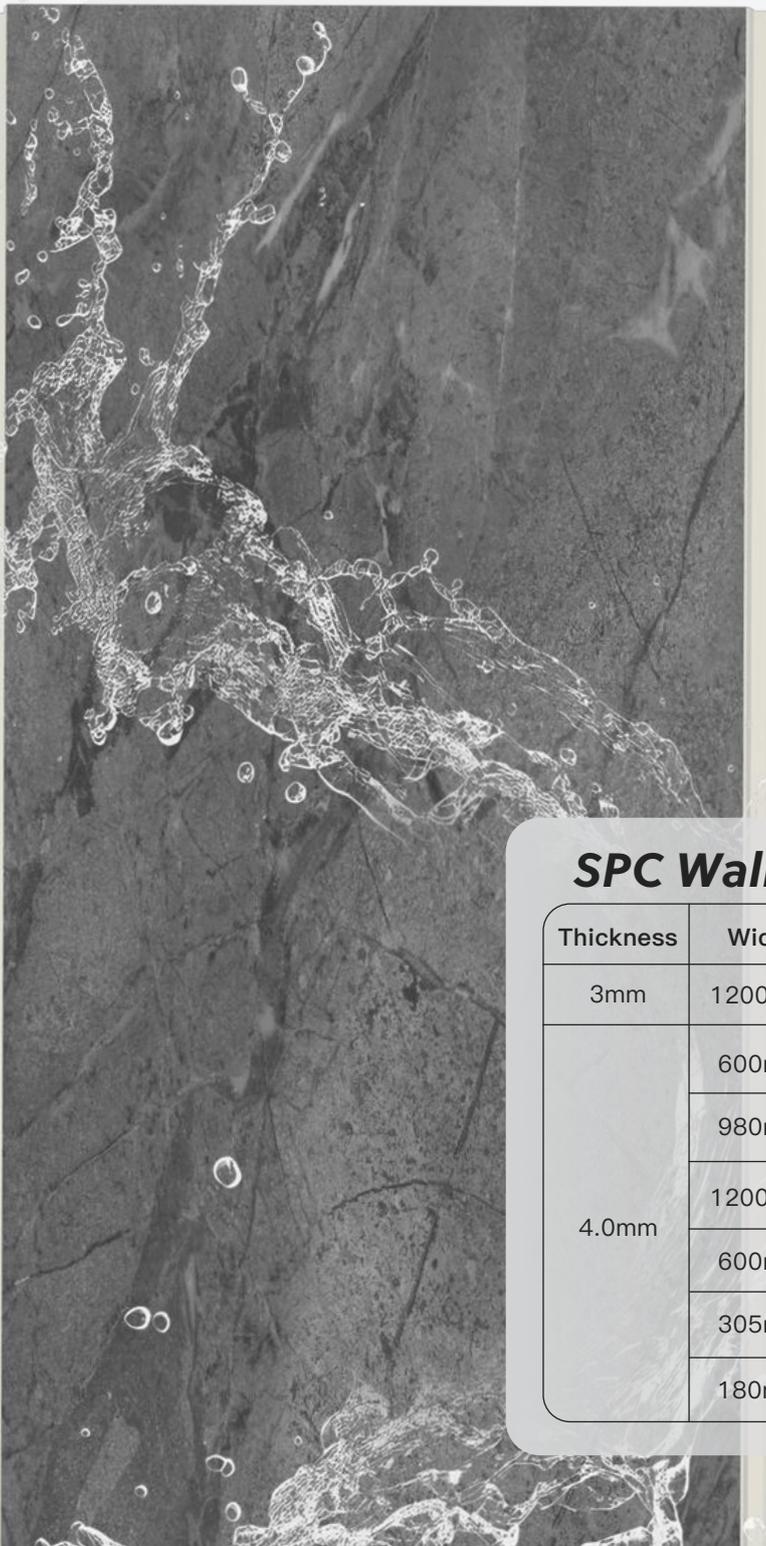

● **Advantage**



Quick & Easy install

-  5x quicker vs. traditional stone
-  One-panel full height for 2.4m+ spaces
-  Eco-adhesive replaces mortar, easy DIY.
-  Smart lock design, easy install
-  Ready to use in 24h post-install
-  Install directly on old walls (solid & flat) without removal

Superior performance



-  Water/moisture resistant for wet areas
-  Tough, impact-resistant, durable
-  Stain-resistant, easy-clean, low maintenance
-  B-Grade Fire Rating

Health & safety assured

-  Formaldehyde-free (E1 grade)
-  Heavy metal-free
-  Plasticizer-free



● Glossy Collection

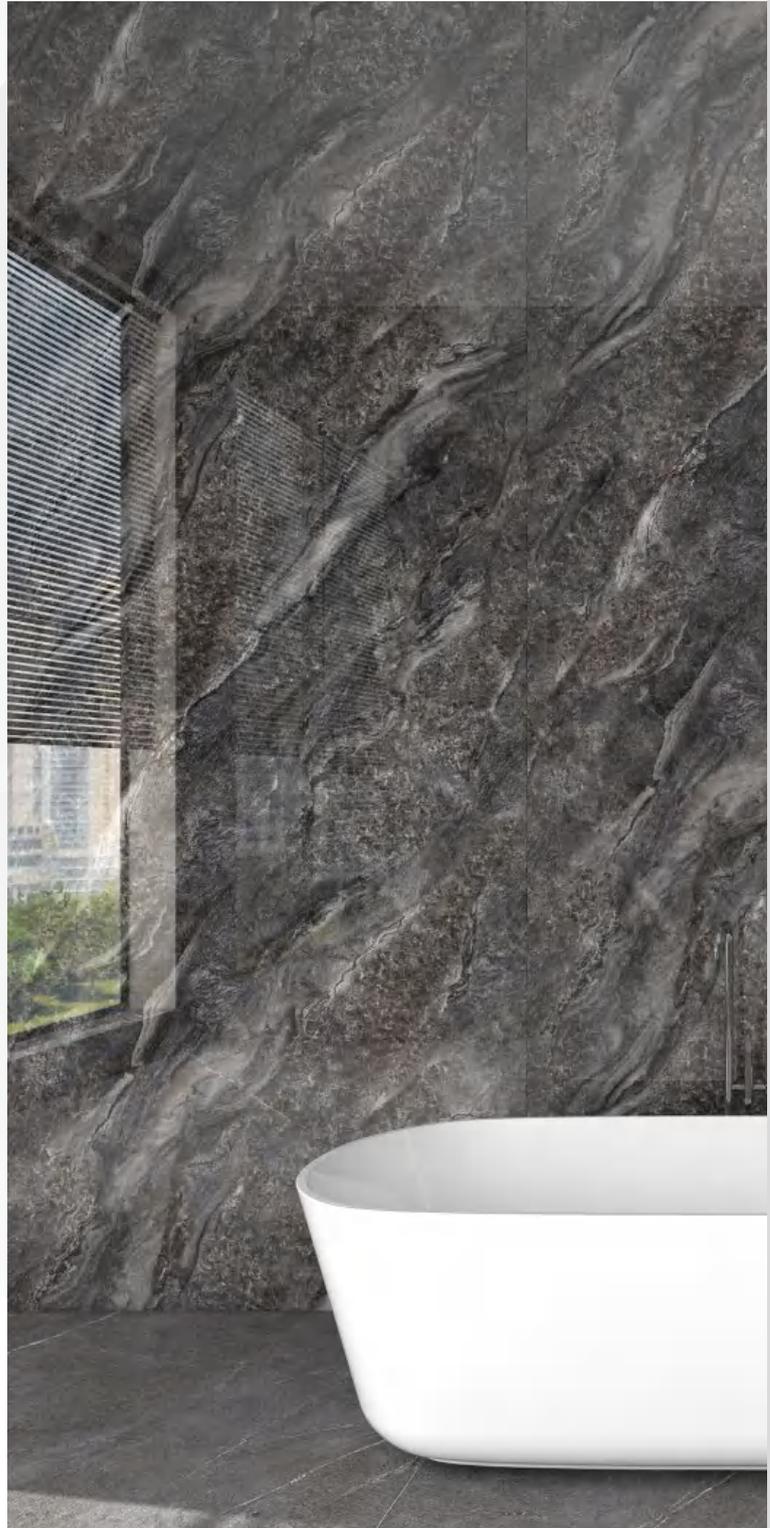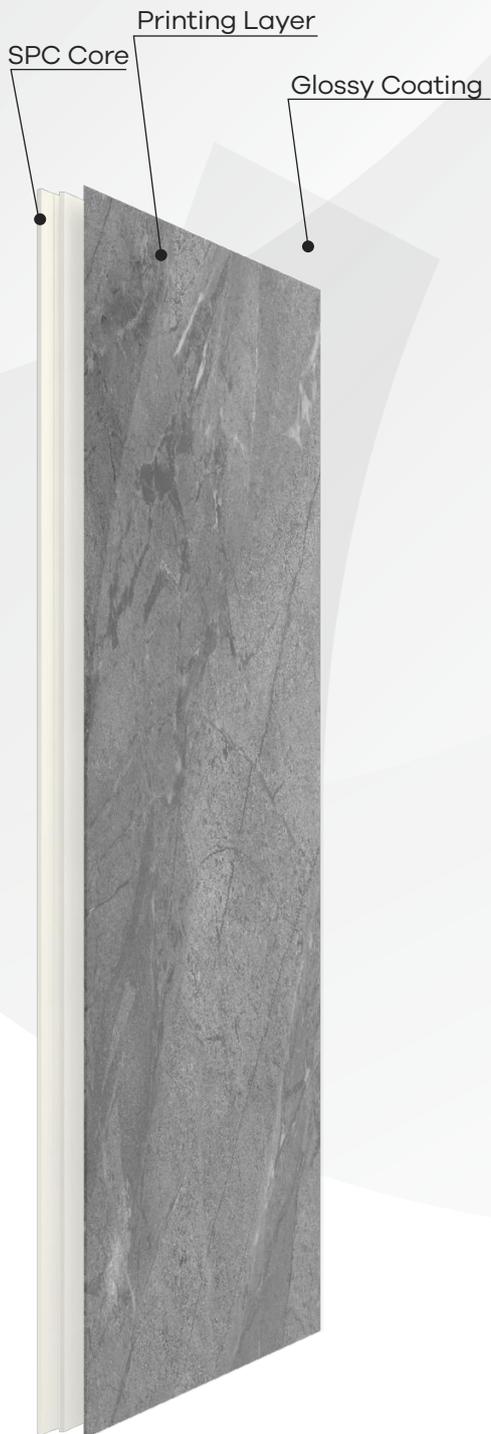

GLOSSY COLLECTION

Glossy Collection

Glossy finish delivers a visual and tactile experience similar to tiles and marble.
Designs: Marble, Stone

● Matte Collection



MATTE COLLECTION

Matte Collection

Natural matte finish with a soft touch—an exquisite replica of the originals.
Designs: Stone, Wood, Fabric, Solid color



• Connecting system

T&G System

Flat Tongue & Groove locking system enables seamless, hassle-free installation.




T&G Installation Guide


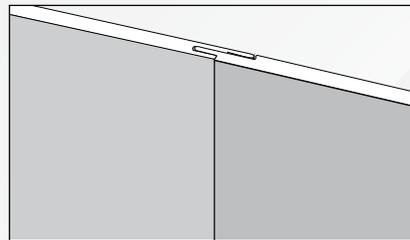
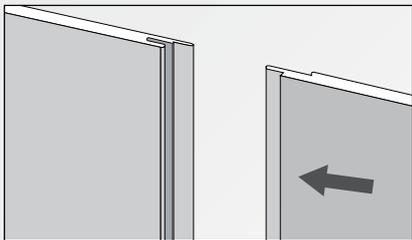


Hidden H System

Hidden H system is stable and beautiful, and convenient to install and durable.

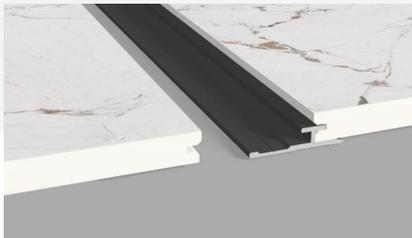

Hidden H Installation Guide

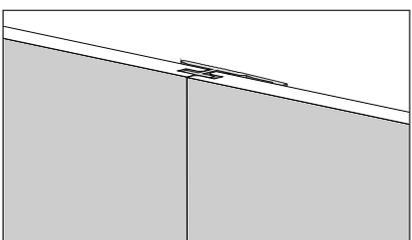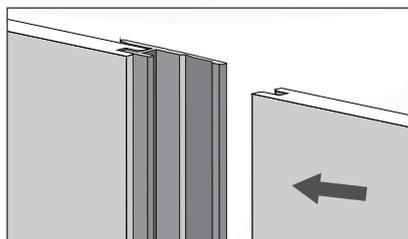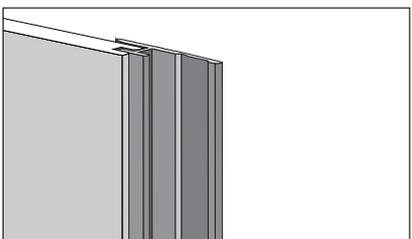

• SPC Wall Panel Installation

Wall Preparation


1. Wall flatness degree $\leq 3\text{mm}/2\text{M}$, vertical degree $\leq 2\text{mm}/2\text{M}$;
2. Internal and external corner squareness $\leq 2\text{mm}$;
3. Solid and dry walls, no lime-shedding and no delaminating, clean and no-stains, etc.

Condition


1. Temperature within $15\text{--}25\text{ }^\circ\text{C}$;
2. Humidity $\leq 65\%$;
3. Wall panel needs to be acclimatised in the construction environment for 24 hours before installation.

DIFFERENT SOLUTIONS FOR ROUGH WALL

Cement Walls (Substrate Meets Requirements)

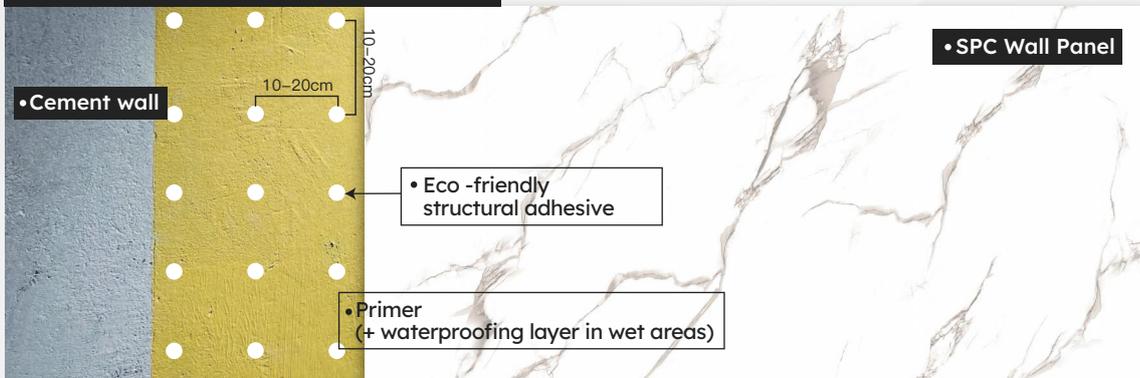

Cement Walls (Substrate Does Not Meet Requirements)

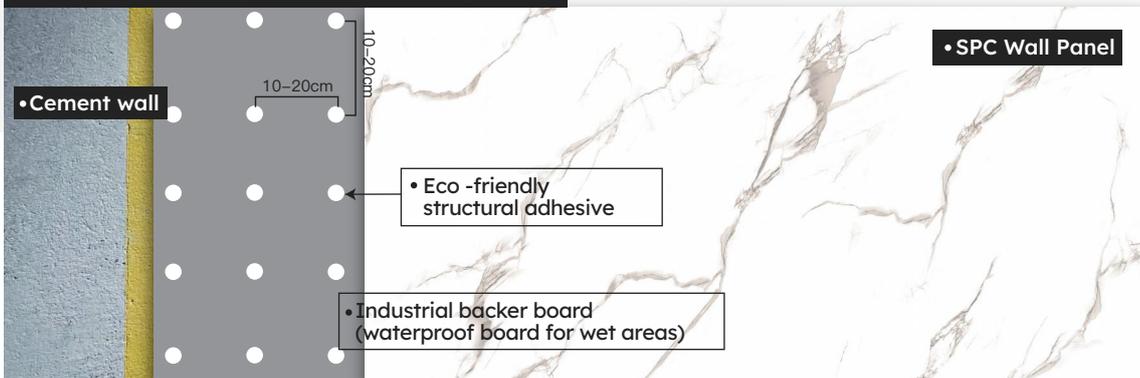


Renovation Installation (Tile/Painted Surface — Stable, no delamination or dusting)




● **Joint Solution**

A. External Corners

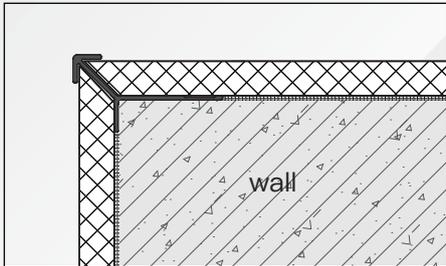


External Corner Trim

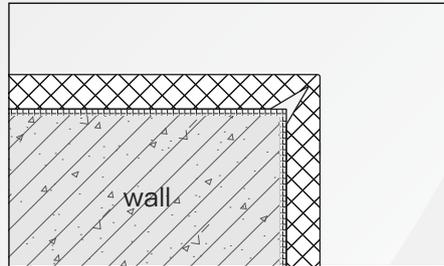


External Bending

*Only for panel with PVC wear layer


B. Internal Corners

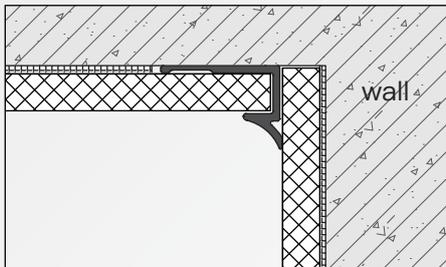

Internal Corner Trim

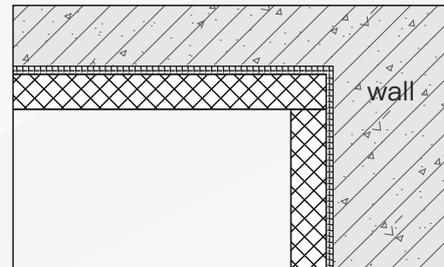


Direct Assembly

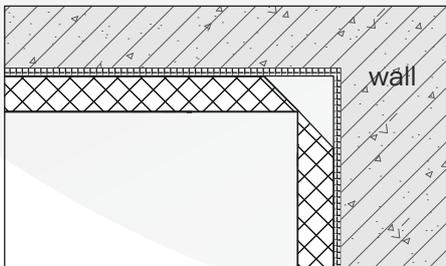

Internal Bending






*Only for panel with PVC wear layer

C. Closing

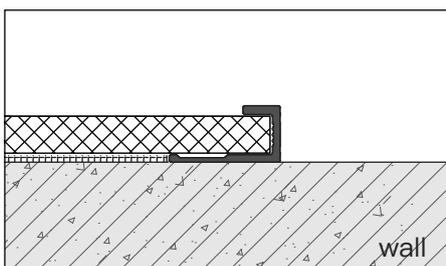


Closing Trim

● **Grouting Design**

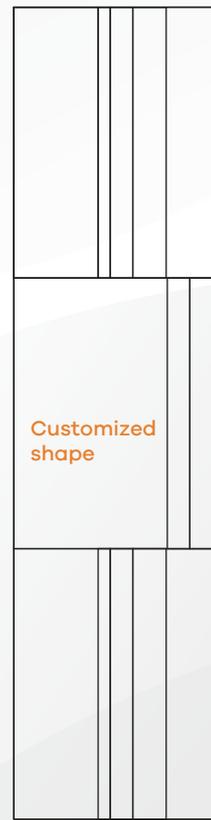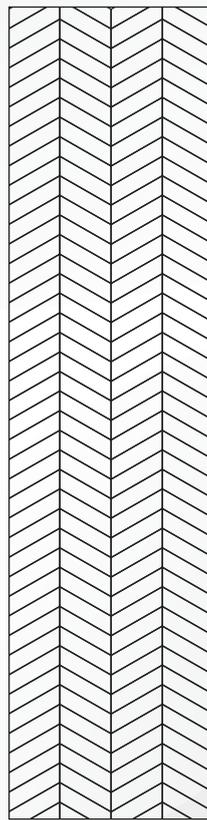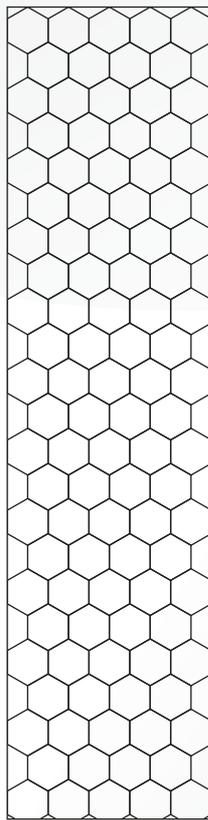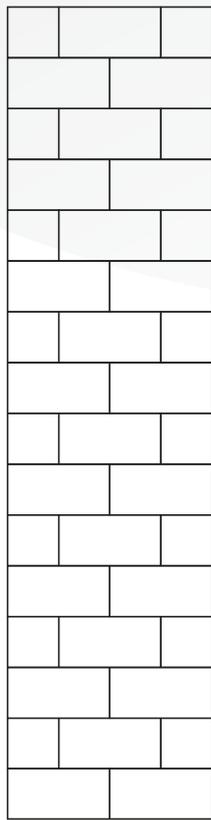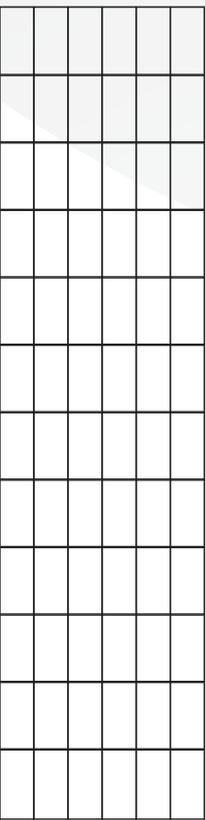

UNLOCK PERSONALIZED WALL EXPRESSION

● SPC Wall Panel Size

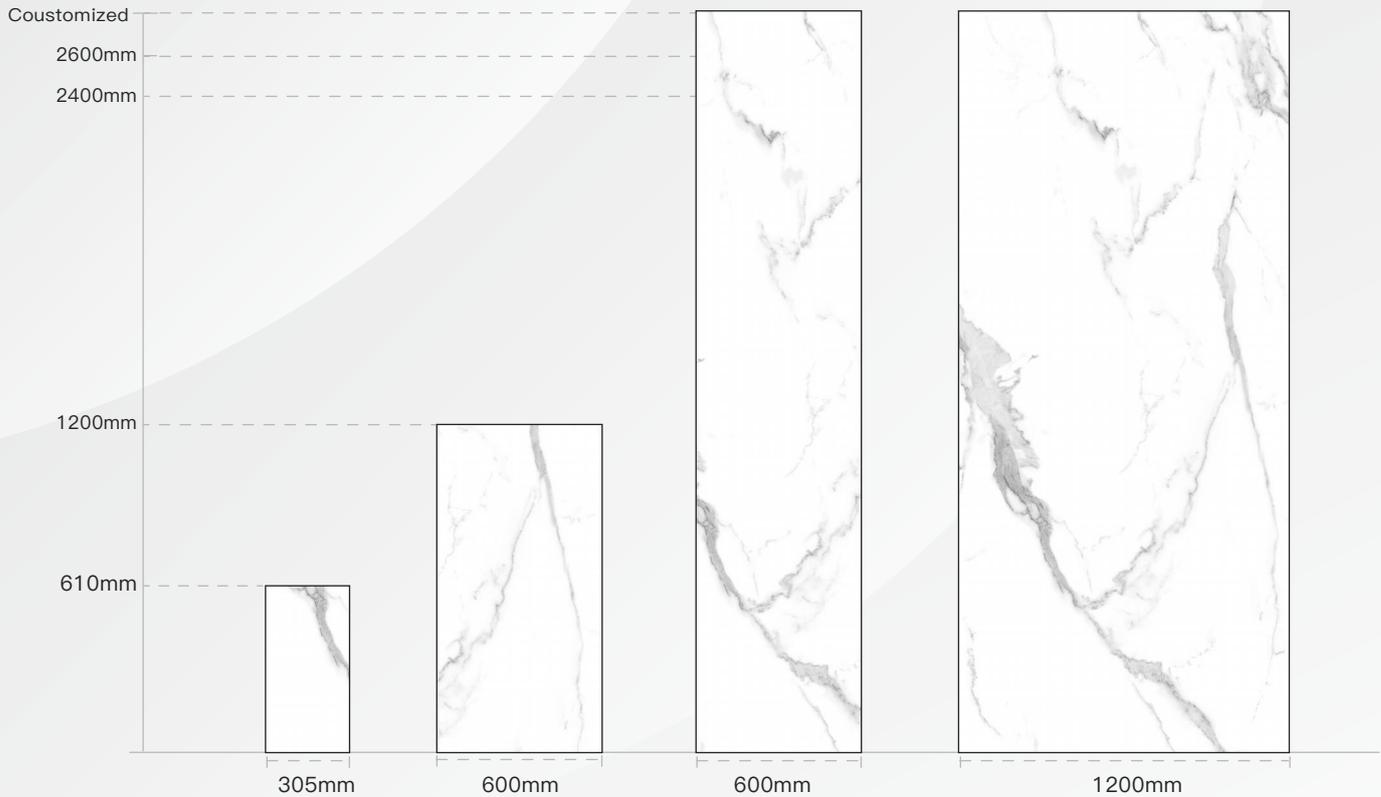

● Technical Specification

Performance Attribute	Standard	Result
Total Thickness	ISO 24346	3.0/4.0mm
Peeling strength of layers	EN 431	≥ 50
Dimensional Stability (Shrinking 80°C/6H)	ISO 23999	≤ 0.06%
Light fastness	ISO 105-B02	≥Grade 6
Fire Resistant Classification	EN 13501-1	B
Boiling Water 100°C/2H	EN438	No bubble, no delamination
Toxic Elements Analysis	EN71-3	ND
Phthalates Test	CPSC-CH-C1001-09.4	ND
Formaldehyde content test	EN 717-1	ND

Zhejiang Hailide Flooring Co., Ltd

📍 No.96, Haishi road, Jianshan new industrial zone, Haining city, Zhejiang province, China 314415

✉ flooring@halead.com

🌐 www.haleadfloor.com



Instagram



YouTube

Reliable & Innovative Floor & Wall Covering Partner